
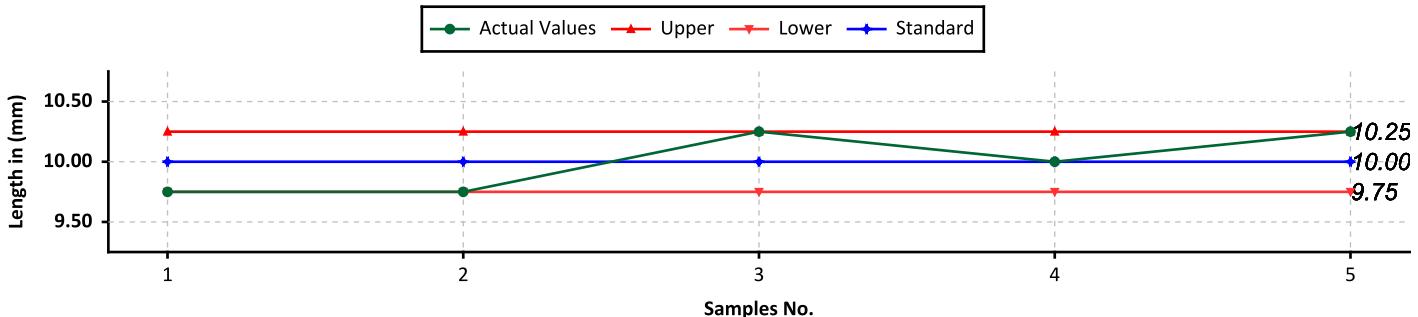
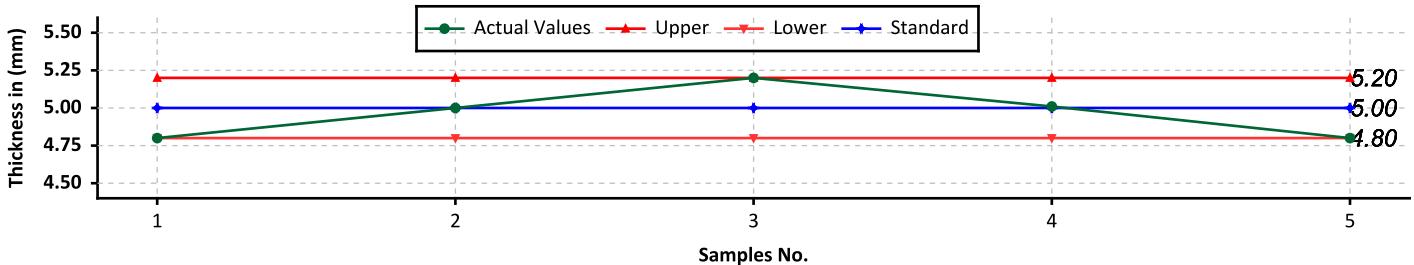


**REGULAR HARDNESS & DIMENSION REPORT**

<b>Product Name</b>	DOLO 500		
<b>Batch No.</b>	reg/com11	<b>Department</b>	Deapartment Test 1 @
<b>BFG Code No.</b>	456	<b>Date</b>	17.12.2025
<b>No. of Samples</b>	5	<b>Start Time</b>	16:34:58
<b>Equipment Code No.</b>	Equipment-1	<b>Hardness Tester Code No.</b>	HD001
<b>Side</b>	NA		
<b>Stage</b>	Compression		

**Standard Limits**

<b>Hardness (Kp)</b>		<b>Thickness (mm)</b>		<b>Length(mm)</b>	
Lower =	50	Lower =	4.80	Lower =	9.75
Standard =	75	Standard =	5.00	Standard =	10.00
Upper =	150	Upper =	5.20	Upper =	10.25

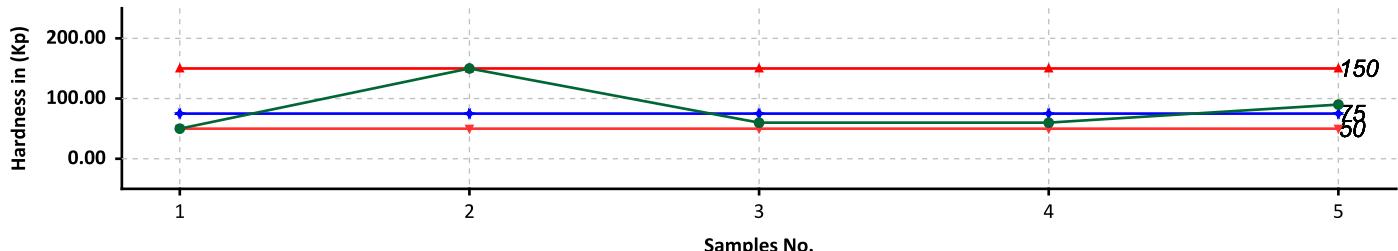

**REGULAR HARDNESS & DIMENSION REPORT**
**Test Results**

Sample No.	Hardness (Kp)	Thickness (mm)	Length(mm)
1	50	4.80	9.75
2	150	5.00	9.75
3	60	5.20	10.25
4	60	5.01	10.00
5	90	4.80	10.25

Statistics			
Average	= 82.0 Kp	Average	= 4.96 mm
Minimum	= 50 Kp	Minimum	= 4.80 mm
Maximum	= 150 Kp	Maximum	= 5.20 mm
Std. Deviation	= 40.8656	Std. Deviation	= 0.1680
Minimum %	= 33.33	Minimum %	= 4.00
Maximum %	= 100.00	Maximum %	= 4.00
<b>Result:</b>	Complies	<b>Result:</b>	Complies

Performed by : yogita

Date &amp; Time : 17.12.2025 &amp; 16:34:58